

Earth Observing-1

Home News Search Intranet

Mission
 Spacecraft
 Instruments
& Technologies
 Science
 Launch
 Education

Fiber Optic Data Bus Publications

The following are a list of documents published or presented relating to the EO-1 Fiber Optic Data Bus:

- GOMAC Paper - "[Spaceborne Fiber Optic Data Bus \(SFODB\)](#)"
 - By J.W. Bretthauer of NASA GSFC, Fred Orlando of Orlando & Assoc., Inc., C.H. Chalfant of Optical Networks, Inc., E. Rezek of TRW, and M. Sawyer of Broadband Communications Products.

Last Update: 8/10/99

Credits

NASA Official/Author: [Nick Speciale](#)

Curator: [Trish Johnson](#)

[Development Credits](#)

Official Notice: [Privacy Statement](#)

Abstract: Spaceborne Fiber Optic Data Bus (SFODB) is an IEEE 1393 compliant, gigabit per second, fiber optic network specifically designed to support the real-time, on-board data handling requirements of remote sensing spacecraft. The network is fault-tolerant, highly reliable, and capable of withstanding the rigors of launch and harsh space environment. SFODB achieves this operational and environmental performance while maintaining the small size, light weight, and low power necessary for spaceborne applications.

- AIAA Paper - "[IEEE 1393 Spaceborne Fiber Optic Data Bus](#)" -
 By Dennis Andrucyk of NASA GSFC, Fred Orlando of OAI, and Charles Chalfant of SPI.

Abstract: The Spaceborne Fiber Optic Data Bus (SFODB) is the next generation in on-board data handling networks. It will do for high speed payloads what SAE 1773 has done for on-board command and telemetry systems. That is, it will significantly reduce the cost of payload development, integration and test through interface standardization. As defined in IEEE 1393, SFODB is a 1 Gb/s, fiber optic network specifically designed to support the real-time, on-board data handling requirements of remote sensing spacecraft. The network is highly reliable, fault tolerant, and capable of withstanding the rigors of launch and the harsh space environment. SFODB achieves this operational and environmental performance while maintaining the small size, light weight, and low power necessary for spaceborne applications. SFODB was

developed jointly by DoD and NASA GSFC to meet the on-board data handling needs of Remote Sensing satellites. This jointly funded project produced a complete set of flight transmitters, receivers and protocol ASICs; a complete Development & Evaluation System; and, the IEEE 1393 standard.

- Publication - "[Twelve Channel Optical Fiber Connector Assembly: From Commercial Off The Shelf to Space Flight Use](#)" - SPIE Vol. 3440 Conference on Photonics for Space Environments VI in San Diego, CA, 1998, pp. 57-68, by Melanie Ott of NASA GSFC.

Abstract: The commercial off the shelf (COTS) twelve channel optic fiber MTP array connector and ribbon cable assembly is being validated for space flight use and the results of this study to date are presented here. The interconnection system implemented for the Parallel Fiber Optic Data Bus (PFODB) physical layer will include a 100/140 micron diameter optical fiber in the cable configuration among other enhancements. As part of this investigation, the COTS 62.5/125 micron optical fiber cable assembly has been characterized for space environment performance as a baseline for improving the performance of the 100/140 micron diameter ribbon cable for the Parallel FODB application. Presented here are the testing and results of random vibration and thermal environmental characterization of this commercial off the shelf (COTS) MTP twelve channel ribbon cable assembly. This paper is the first in a series of papers which will characterize and document the performance of Parallel FODB's physical layer from COTS to space flight worthy.

Home 

Contact

Trish Johnson

EO-1 Project Team

QSS

Phone: (301)286-7492

Email: tljohnson@pop700.gsfc.nasa.gov

Nick Speciale

EO-1 Mission Technologist

NASA's Goddard Space Flight Center

Mail Code: 490

Phone (301) 286-8704

Email: Nicholas.J.Speciale.1@gssc.nasa.gov



- Spacecraft
- Science
- Education

- Mission
- Instruments & Technologies
- Launch

- Home
- News
- Intranet

Last Update: 9/25/01

More Info

[Partners](#)

Related Sites

Credits

Instruments & Technologies

[Summary](#) [Image Map](#) [Instruments](#) [Technologies](#)
[Contacts](#)

Technology Summary

The Earth Observing-1 (EO-1) Mission will fly three advanced land imaging [instruments](#) and seven revolutionary crosscutting [spacecraft technologies](#). The three advanced imaging instruments will lead to a new generation of lighter weight, higher performance and lower cost Landsat-type imaging instruments for the Earth Science Enterprise. Additionally, the EO-1 Mission will flight validate a number of crosscutting spacecraft subsystem technologies which if successful, will enable future Earth and Space Science missions to be conducted using smaller, lower weight and reduced power spacecraft buses. **See the [EO-1 Instrument Image Map](#) below to learn more about it.**

More Top

Instruments

Three instruments will be flown on the EO-1 spacecraft. Each instrument incorporates revolutionary land imaging technologies which will enable future Landsat and Earth observing missions to more accurately classify and map land utilization globally. [See instrument overview document](#). Point and click on each instrument in the [image map](#), or use the text links below for more information.

NASA Official/Author: [Nick Speciale](#)

Curator:
[Trish Johnson](#)

[Development Credits](#)

Official Notice: [Privacy Statement](#)

[Advanced Land Imager](#)
[Atmospheric Corrector](#)
[Hyperion \(Hyperspectral Imager\)](#)

More ▾ Top ▲

*T*Technologies

Seven crosscutting technologies which will reduce the cost, mass and complexity of future Earth observing spacecraft will be demonstrated by EO-1 and will allow more scientific payload to fly on future missions. Point and click on each technology in the [image map](#), or use the text links below to find out more about each specific technology.

[X-Band Phased Array Antenna](#)
[Carbon-Carbon Radiator](#)
[Lightweight Flexible Solar Array](#)
[Wideband Advanced Recorder Processor](#)
[Pulsed Plasma Thruster](#)
[Enhanced Formation Flying](#)
[Fiber Optic Data Bus](#)


More ▾ Top ▲

*C*ontact

Joseph Young
EO-1 Mission Technology Transfer Manager
NASA Goddard Space Flight Center
Phone: (301) 286-8146
Fax: (301) 286-1736
Email: joseph.p.young.1@gsfc.nasa.gov

More ▾ Top ▲

Instruments Image Map

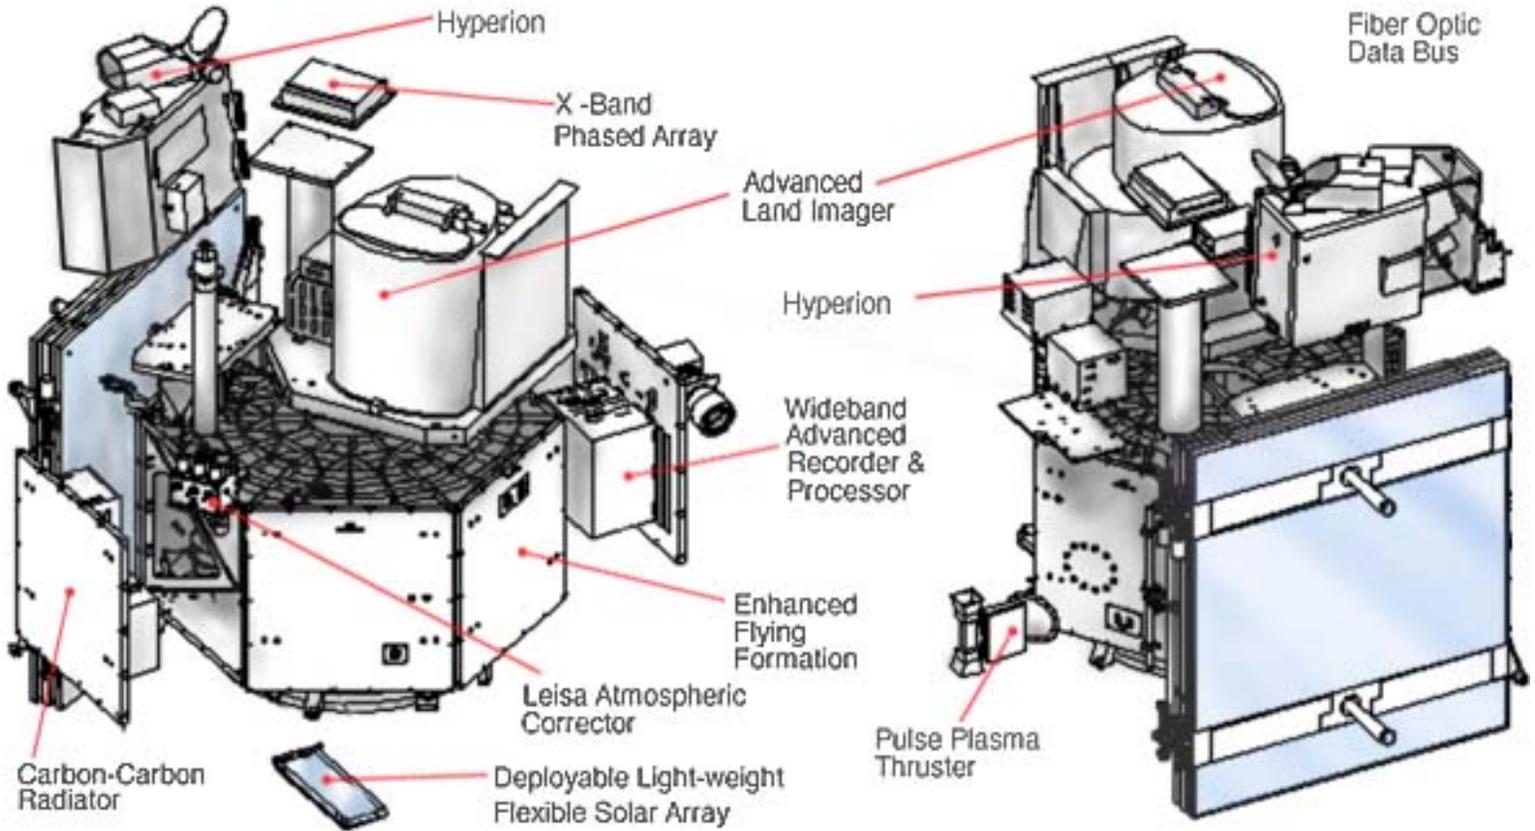

Top ▲

Spaceborne Fiber Optic Data Bus (SFODB)

J.W. Bretthauer^a, C.H. Chalfant^b, F.J. Orlando^c, E. Rezek^d, M. Sawyer^e

^aNASA Goddard Space Flight Center, Code 561; Greenbelt, MD

^bOptical Networks, Inc., Fayetteville, AR

^cOrlando & Associates, Melbourne, FL

^dTRW, Redondo Beach, CA

^eBroadband Communications Products (BCP), Melbourne, FL

ABSTRACT

Spaceborne Fiber Optic Data Bus (SFODB) is an IEEE 1393 compliant, gigabit per second, fiber optic network specifically designed to support the real-time, on-board data handling requirements of remote sensing spacecraft. The network is fault tolerant, highly reliable, and capable of withstanding the rigors of launch and the harsh space environment. SFODB achieves this operational and environmental performance while maintaining the small size, light weight, and low power necessary for spaceborne applications.

On December 9, 1998, SFODB was successfully demonstrated at NASA's Goddard Space Flight Center (GSFC).

INTRODUCTION

The SFODB technology was jointly funded by the Department of Defense (DoD) and NASA SFODB and scheduled for integration on NASA's Earth Orbiter 1 (EO-1) satellite. The Science Advisory Team chose SFODB for its design flexibility and widespread applicability to future Earth Science missions. The Spaceborne Fiber Optic Data Bus (SFODB) Technology was selected by the New Millennium Program/Integrated Product Development Teams as a high payoff, revolutionary technology suitable for flight validation upon the Earth Orbiter-1 Mission. For this mission, science users rated SFODB highest among all cross cutting spacecraft technologies. SFODB addresses the prevalent need for a high data rate, standardized "plug and play", low power, small footprint, science instrument data interface. Such an interface is required for enabling and reducing the cost of NASA's future Earth and Space Science Missions. NASA's New Millennium Program leveraged off of DoD's previous SFODB investment to flight validate and reduce non-recurring engineering for future hyperspectral imaging and other high rate spacecraft applications.

In July 1998, due to primarily sensor cost, schedule, and spacecraft accommodation issues, SFODB was de-manifested from the EO-1 mission. However, SFODB ground support equipment was developed with flight SFODB components and demonstrated at NASA's Goddard Space Flight Center (GSFC) on December 9, 1998.

Teamwork was essential for SFODB's development. The SFODB project includes: joint DoD/NASA funding and technical support; joint TRW/Honeywell internal research and development to fabricate the radiation-hardened component technologies; Orlando & Associates, Inc.'s oversight and IEEE 1393 compliance; Optical Networks' and the University of Arkansas' high speed optical transceivers; Broadband Communications Products demonstration and development of a low cost development system; and Litton Amecom's commercialization of flight components. Full SFODB functionality was demonstrated by a team of BCP, OAI, and TRW engineers. Here, we present SFODB's capabilities, an EO-1 example application, and the demonstrated results.

TECHNOLOGY OVERVIEW

SFODB is a revolutionary, high-speed spacecraft bus architecture based upon the commercial, Asynchronous Transfer Mode (ATM) telecommunications standard. The highly reliable, deterministic network can simultaneously support command, telemetry, and multiple high bandwidth instruments over its fiber optic bus. SFODB's one gigabit per second data transfer rate represents a thousand-fold data rate increase over the flight proven SAE 1773 fiber optic protocol. The IEEE 1393 SFODB implements a redundant, cross strapped, ring-based architecture which includes one controller node and up to 127 transmit/receive nodes, as shown in Figure 1 below.

Figure 1. SFODB Fiber Optic Network

SFODB's low mass, low power, and reliable, high speed data transfer rate make it well-suited for hyperspectral imaging and other high speed applications. SFODB was designed to support bit error rates less than 10^{-13} per node for non-solar flare environments and 10^{-11} per node during the maximum solar flare. Its commercial, software configurable, ATM based protocol provides users extraordinary flexibility when designing their data handling architectures. Its ATM compatibility allows the spacecraft to bypass the traditional groundstation and route data directly to the user. The fiber optic cable contains 100/140 micron, multimode graded index fiber. SFODB's standard, plug and play interface attributes combine to significantly reduce spacecraft development

time and cost. More detailed technical information about SFODB's capabilities and example applications may be found at the following websites:

OAI: <http://home.earthlink.net/~fjorlando/>

NASA/GSFC: <http://eo1.gsfc.nasa.gov>

BACKGROUND

The IEEE 1393 SFODB network, shown in Figure 1, was developed jointly by DoD and NASA. TRW and Honeywell were the industry partners responsible for designing and fabricating the original Serial SFODB multi-chip modules (MCMs), see Figure 2 below.

Figure 2. Serial SFODB Multi-chip Module
Serial SFODB controller node is illustrated above.

EO-1 chose SFODB to serve as a reliable, high rate, data transfer media between its science instruments and the Wideband Advanced Recorder Processor (WARP). The Advanced Land Imager (ALI), the Atmospheric Corrector (AC), and the Hyperspectral Imager (HSI) would all interface to their respective SFODB node and simultaneously transmit data to the WARP, as shown in Figure 3.

The SFODB technology is implemented using either a serial or parallel architecture. Parallel and serial implementations are functionally identical and transparent to the user. The original SFODB technology demonstration for EO-1 employed a serial SFODB approach. When limited availability of critical high speed Gallium Arsenide (GaAs) integrated circuits caused Serial SFODB schedule delays (see Fig. 3), NASA baselined the Parallel SFODB architecture. The Parallel Fiber Optic Data Bus architecture satisfied NMP's critical NMP validation objectives. The next two sections briefly describe Serial and Parallel SFODB architectures. Figure 3. Example: EO-1 SFODB Application

Serial SFODB Implementation

The Serial SFODB architecture implements the IEEE 1393 Spaceborne Fiber Optic Data Bus standard. The standard utilizes a redundant fiber optic ring which includes 1-primary link, 1-redundant link, 2-cross strapped links, and 2-bypass links. The software configurable, ATM based network is scalable and supports data rates from 200 Mbps up to 1 Gbps. The SFODB consists of two types of nodes, a control node (CFBIU) and up to 127 data nodes (FBIUs). Data is 8B/10B encoded to improve the BER performance to less than one error in 10^{-13} bits. The CFBIU serves as the configuration and control interface to the SFODB network. The FBIUs serve as the user's interface to the SFODB network. The SFODB network supports three types of protocol emulations: Connection Switch, Packet Switch, and Token Passing. The network can support all three modes simultaneously.

Figure 4 illustrates the high speed, GaAs integrated circuits (clock recovery unit, transmitter, 8B/10B encoder, 8B/10B decoder, transmitter, and receiver ASICs). Honeywell's most recent SFODB GaAs wafer fabrication was successfully completed by October 1998. Wafer-level testing verified a wafer lot yield, exceeding 17%, which supports the limited production requirements of spacecraft applications.

Figure 4. Serial SFODB ASIC Components

Parallel SFODB Implementation

Parallel and serial implementations are functionally identical and transparent to the user. The Parallel SFODB network is scalable and supports data rates from DC up to 1 Gbps. Except for the physical layer, Parallel SFODB implements the complete IEEE 1393 protocol. Parallel SFODB excludes Serial SFODB's low yield GaAs components but shares the same RICMOS IV and dual-port RAM ASICs (see Figure 4). In addition, the Parallel SFODB implementation can easily accommodate new electronic and fiber-optic interface technologies as they become available, to achieve higher data throughput rates.

Parallel SFODB's simplest implementation replaces the Serial SFODB's primary, cross strap, and redundant fibers with a parallel, 12-channel, fiber optic ribbon cable. The 12-channel ribbon fiber consists of 8 data bits, 1 byte clock, a frame sync signal, and 2 backup channels which provide redundancy for the primary 10 channels (see Fig. 5).

Figure 5. Parallel SFODB Block Diagram – FBIU

Parallel SFODB's physical layer was developed by Optivision (now Optical Networks, Inc) via NASA/GSFC small business innovative research (SBIR) grants. The SBIR programs produced prototype, 12-channel fiber optic transmitter/receiver pairs (see Figure 8). All prototypes passed performance verification testing, vibration, and EO-1 level total dose and single event upset (SEU) radiation testing. Engineering and flight units are being fabricated. The 12-channel fiber optic ribbon cable assembly is a modified commercial product from GORE and USCONNECT. NASA/GSFC also partnered with GORE and USCONNECT to develop the 12-channel, fiber optic cable assemblies. NASA/GSFC analyzed the commercial product to identify failure modes, conducted outgassing and vibration testing, and recommended modifications necessary to support SFODB in EOS-PM missions.

Due to its byte wise parallel physical layer, Parallel SFODB operates at about one eighth the clock rate as serial SFODB and maintains a 1 Gbps user-data throughput. This implementation uses standard, rather than very high speed and high risk, integrated circuit technology. Parallel FODB also eliminates the special

coding and clock recovery functions necessary with a serial implementation. Its relatively low complexity and risk greatly reduces parallel SFODB's non-recurring development cost and time.

Industry partners will use SFODB or its component technologies both in their production lines and in other fiber optic programs. Orlando and Associates, Inc. and Broadband Communications Products will produce and market the SFODB Development and Evaluation System. Space Photonics, Inc. will produce and market the high speed flight transmitters and receivers (formerly produced by ONI). TRW has designed SFODB technologies into several of their spacecraft programs. Litton Amecom is partnering with NASA/GSFC to design a "plug and play" Parallel SFODB flight module.

Parallel SFODB Demonstration

On November 6, 1998, the first Parallel SFODB testbed, containing one controller node and one user node, was 100% functional and operated at 1 Gbps. To meet the SFODB project's demonstration goal (December 9, 1998), another user node was added to the system.

The Parallel SFODB Development and Evaluation System, illustrated in Figure 7, was successfully demonstrated at NASA's Goddard Space Flight Center on December 9, 1998. Protocol Verification using the Parallel SFODB Development and Evaluation System was completed and successfully verified full compliance to the SFODB IEEE 1393 standard.

The demonstrated system contained 1 Parallel SFODB controller node, two Parallel SFODB user nodes, a personal computer with customized-SFODB LabView software, fiber optic cable assemblies, and a National Instruments cable used to send and receive information to the fiber optic ring. User test data was entered, buffered into the computer's memory, inserted onto the fiber optic ring and verified via the Parallel SFODB Development and Evaluation System. The development system provides a user-friendly tool for flight processor development and verification. It also provides Earth Science Users a platform to test their instrument's interface and data compatibility with the SFODB network. The demonstration also showed SFODB's ability to replace costly multiplexing and demultiplexing flight hardware.

The Parallel SFODB's Development and Evaluation System utilizes the flight SFODB protocol and dual port random ASICs. To reduce costs, the system also contained engineering test unit versions of the fiber optic cable assemblies, transceivers, field programmable gate arrays, and oscillator. The commercial grade engineering test components were not screened as strictly as flight components and had some performance variations. The system performed exceptionally well and was demonstrated at a remarkable .8 Gbps (800 Mbps).

Although Litton Amecom is designing flight, "plug and play" Parallel SFODB modules, the current design can support flight missions. To support flight missions, known flight components (oscillator, a radiation-hardened ASIC, transceivers, and fiber optic cable assemblies) would replace the engineering test components. The personal computer interface would also be replaced with a flight processor and SFODB commands generated from the customized SFODB LabView software would be translated into flight software.

User's Data Input Interface

SFODB implements a simple, straightforward user interface. User data is placed on the SFODB ring via a bit clock and 32 bit parallel data interface (PFODB write port). For example, data transmission is achieved by connecting a clock signal and the output of an analog to digital converter to the PFODB write port (equivalent to one of the gray, on-board connectors illustrated in Fig. 8).

SUMMARY

SFODB's flexible, high rate architecture provides user's enormous design flexibility. Its revolutionary, high-speed spacecraft bus architecture supports direct data downlinks to end-users. The highly reliable and deterministic SFODB network can simultaneously support command, telemetry, and multiple high bandwidth instruments over its fiber optic bus. SFODB's Development and Evaluation System will dramatically reduce flight development cost and time. Future efforts will produce SFODB testbeds for instrument developers and provide "plug and play" flight modules.

Figure 7. PFODB Demonstration Set-up

Figure 8. PFODB Development Board - FBIU

Acknowledgements

We wish to thank everyone who contributed to the overall success of this project. Special thanks go to: Bill Schneider; [TRW-Ron Smith, Arthur Claybon, and Hung Ngo]; [University of Arkansas-Patrick Parkerson]; [Honeywell SSEC-Gary Kirchner and team]; USCONNECT; GORE; [Swales-Melanie Ott]; [NASA-Dennis Andrucyk, John Kolasinski, Philip Luers, Terry Smith, Evan Webb, George Jackson, Robert W. Stone, and Nicholas Speciale].

References

- [1] <http://eol.gsfc.nasa.gov>
- [2] <http://home.earthlink.net/~fjorlando/>
- [3] IEEE SFODB Working Group of the Bus Architecture Standards Committee, "P1393 Spaceborne Fiber Optic Data Bus (SFODB)," Institute of Electrical Engineers, Inc., New York, NY, August 1997.

[4] Melanie N. Ott, Joy W. Bretthauer, "Twelve channel optical fiber connector assembly: from commercial off the shelf to space flight use," Photonics for Space Environments VI, Proceedings of SPIE Vol. 3440, 1998.